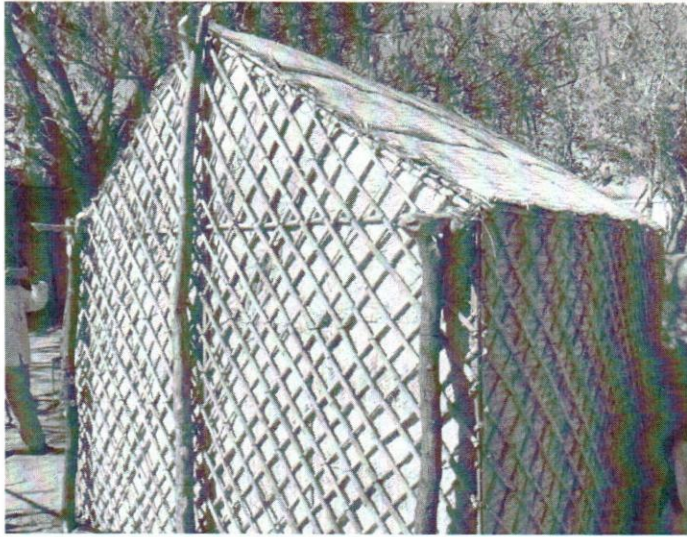


Name: Construction of readymade shelters
Dimension: 3.5 X 3m and 2.8 high (by local material)
Location: Nyala ,
Estimated time to complete: one month
ALIGHT is looking for qualify contractor to construct requested BOQ:

No	Description	Unit	Quantity	Unit Cost SDG	Total Cost SDG
1	Readymade bamboo shelter size 3.5*3 m the space between bamboo stick should be (10-12cm) covered by palm mats	pcs	1		
3	Readymade bamboo door size 90cm x 180cm covered by palm mats as per attached picture		1		
4	Forked wooden poles 3.3 m long , dia 10-15 cm	pcs	2		
5	Forked wooden pole 2.3 long. dia 8-15 cm (Y-shape)	pcs	4		
	Wood poles size 3,5m long	pcs	3		
6	Black rob (Alsalam)	kg	1		
	Sample				
					
	Total cost for (1) unit	each	1		
	Total unit cost of 445 units	each	445		
Total in letters :					

Company / Contractor:

Contacts / phone / Address :

Date Signed :

Stamp

